


Q.HOME CORE

Residential Energy Storage Solution



H3S/H7S : DC or AC-coupled

MODEL Q.VOLT H3.8/7.6SX | Q.SAVE D10.0/15.0/20.0SX | Q.HOME HUB 200SX

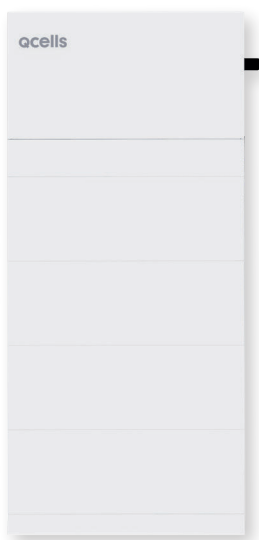

Q.VOLT & Q.SAVE



Q.HOME HUB

Better Energy. One Powerful Partner.

Security that protects against uncertainty. Power you can rely on. Design that scales to your needs.



Peace of Mind

One Brand. One Warrantor. Backed by Qcells' inclusive 10-year product warranty on all Q.HOME CORE components with best-in-class customer support.



Smart Design and Scalable Solutions

Parallel stacking so you can scale the system to the size your home needs.



Simplified Installation and Commissioning

Smart commissioning via a web browser or mobile app, and remote diagnostics for issue resolution.



Compact Design and Sleek Appeal

Save floor space with a single battery and inverter integrated into one tower with a modern, very thin profile



Safety and Reliability

Integrated module-level rapid shutdown solution.



Ideal Complete Solution to Fit Your Lifestyle

Q.VOLT, Q.SAVE and Q.HOME HUB pair perfectly with Qcells' #1 residential solar panels* for a full suite of clean energy solutions for any home.

*Wood Mackenzie U.S. PV Leaderboard for 16 consecutive quarters for the residential segment.

Q.HOME CORE

Q.VOLT H3.8/7.6SX



- Up to 200% oversizing allowed
- Up to 3 MPPTs
- Maximum 16 A PV input current
- Microgrid supported
- Peak efficiency: 98%
- Integrated arc fault protection and rapid shutdown transmitter

Q.SAVE D10.0/15.0/20.0SX

- Long life & safe LFP battery
- Up to four 5 kWh stackable batteries, 20 kWh maximum
- Modular design & quick installation
- Floor or wall mounted



Q.HOME HUB 200SX

- Maximum 200 A AC current
- Flexible home backup
- Built-in energy management meter

■ Q.VOLT H3.8/7.6SX

		Q.VOLT H3.8SX	Q.VOLT H7.6SX
INPUT PV			
Maximum recommended PV power	[W]	7600	15200
Max DC Power Input*	[W]	5700	11400
Maximum DC voltage	[V]		550
Norminal DC operating voltage	[V]		360
Maximum input current	[A]	A: 16/B: 16	A: 16/B: 16/C: 16
Maximum short circuit current	[A]	A: 20/B: 20	A: 20/B: 20/C: 20
MPPT voltage range	[V]		90 to 500
Start input voltage	[V]		120
No. of MPP trackers, Strings per MPP tracker		2, 1/1	3, 1/1
DC disconnection switch			YES
* Maximum usable PV energy to inverter and battery.			
INPUT/OUTPUT AC			
Nominal AC power	[VA]	3816	7608
Maximum continuous AC power	[VA]	3816	7608
Nominal AC voltage/Nominal AC frequency	[V/Hz]		240/60
Nominal AC current	[A]	15.9	31.7
Displacement power factor			0.8 leading to 0.8 lagging
Total harmonic distortion (THD, rated power)	[%]		< 3
INPUT/OUTPUT BATTERY			
Battery type			Li-ion (LFP)
Maximum output power	[W]	3816	7600
Maximum charge/discharge current	[A]		54
Reverse-polarity protection			YES
Cycle efficiency charging to discharging	[%]	88.5	92.5
ADDITIONAL FEATURES			
AFCI			YES
Rapid shutdown transmitter		Integrated PLC Rapid Shutdown Transmitter	
EFFICIENCY			
CEC weighted efficiency	[%]		97.50
Maximum inverter efficiency	[%]		98.00
POWER CONSUMPTION			
Internal consumption (night)	[W]		< 3
STANDARD			
Safety		UL1741, UL1741SA, UL1741SB, UL1741 PCS, UL1699B, CSA - C22.2 No. 1071-01, Canadian AFCI according to T.I.L. M-07	
Emissions		FCC Part 15 Class B	
Grid connection standards		IEEE1547, UL 1741 SB, CA Rule 21, Rule 14 (HI)	
Revenue grade metering		ANSI C12.20	
INSTALLATION SPECIFICATIONS			
Protection class		NEMA 4X	
Operating temperature range	[°F/°C]	-13 to +140/-25 to +60	
De-rating start temperature	[°F/°C]	113/45 or above	
Storage temperature range	[°F/°C]	-13 to +167/-25 to +75	
Relative humidity	[%]	0 to 95	
Altitude	[ft/m]	9843/3000 MAX	
Typical noise emission	[dBA]	< 30	
Over voltage category		IV (electric supply side), II (PV side)	
GENERAL			
Dimensions (W × H × D)	[in/mm]	331 × 15.7 × 5.7/840 × 400 × 145	
Weight	[lb/Kg]	75/34	
Cooling		Natural convection	
Topology		Transformerless	
Communication interfaces		RS485, CAN, WIFI/Dry Contact	
Warranty		10 years	

■ Q.SAVE D10.0/15.0/20.0SX

		Q.SAVE D10.0SX	Q.SAVE D15.0SX	Q.SAVE D20.0SX
MODEL				
Battery type			100Ah Lithium (LFP)	
Component		BMS-G2 + 2*BAT50-G2	BMS-G2 + 3*BAT50-G2	BMS-G2 + 4*BAT50-G2
NOMINAL CHARACTER				
Voltage	[V]	102.4	153.6	204.8
Operating voltage range	[V]	90 to 116	135 to 174	180 to 232
Total energy	[kWh]	10	15	20
Usable energy*	[kWh]	9	13.5	18
Battery roundtrip efficiency**	[%]		95	
Maximum power	[kW]	5.5	8.3	11.1
Maximum charge/discharge current	[A]		54	
C rating			0.54 C	
Cycle life (90% DOD)			6000 cycles	
Warranty			10 years	

* Test Conditions: 90% DOD, 0.2 C charge & discharge at +25°C.

** Maximum Charge/Discharge power may be variant with different inverter models.

INSTALLATION SPECIFICATIONS				
Charge/Discharge temperature range	[°F/°C]	Charge: 32 to 127.4/0 to 53, Discharge: 14 to 127.4/-10 to 53		
Storage temperature range	[°F/°C]	3 months: 4 to 122/-20 to 50, 1 year: 32 to 104/0 to 40		
Relative humidity	[%]	0 to 100		
Altitude	[ft/m]	9843/3000 MAX		
Protection class		NEMA 4X		

STANDARD				
Certification		UN38.3, UL1642, UL1973, UL9540, UL9540A		
Hazardous materials classification		Class 9		

GENERAL				
Cooling		Natural convection		
Dimensions (W × H × D) - BMS-G2	[in/mm]	33.5 × 5.2 × 5.8/850 × 133 × 148		
Dimensions (W × H × D) - BAT50-G2	[in/mm]	33.5 × 23.6 × 5.8/ 850 × 600 × 148	33.5 × 35.4 × 5.8/ 850 × 900 × 148	33.5 × 47.2 × 5.8/ 850 × 600 × 148
Dimensions (W × H × D) - Base	[in/mm]	33.5 × 2.2 × 5.8/850 × 55 × 148		
Weight	[lb/kg]	BMS-G2: 22/10 + (2) BAT50-G2: 238/108	BMS-G2: 22/10 + (3) BAT50-G2: 357/162	BMS-G2: 22/10 + (4) BAT50-G2: 476/216

■ Q.HOME HUB 200SX

GRID INPUT				
Nominal AC input voltage/Nominal AC frequency	[V/Hz]	120/240, 60		
Maximum AC input current	[A]	160		

OUTPUT TO MAIN PANEL IN GRID TIED OPERATION				
Nominal AC output voltage	[V]	120/240		
Maximum AC input current	[A]	160		

OUTPUT TO MAIN PANEL IN BACKUP OPERATION				
Nominal AC output voltage	[V]	120/240		
Imbalance compensation in backup operation	[VA]	5000		
Split phase imbalance output current	[A]	41.7		
Maximum AC output current	[A]	126.8		

GENERAL				
Dimensions (H × W × D)	[in/mm]	27.8 × 17.7 × 5.9/706 × 450 × 15		
Weight	[lb/Kg]	69.4 / 31.5		
Energy meter accuracy	[%]	1		
Communication interfaces		RS485, CAN, Dry Contact		
Cooling		Fan		
Warranty		10 years		

STANDARD				
Safety		UL1741, CSA 22.2 NO:107		
Emissions		FCC part 15 Class B		

INSTALLATION SPECIFICATIONS				
Altitude	[ft/m]	9843/3000 MAX		
Operating temperature range	[°F/°C]	-13 to +140/-25 to +60		
Protection class		NEMA 3R		
Typical noise emission	[dBA]	< 50		

Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.

Hanwha Q CELLS America Inc. 400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | TEL +1 949 748 59 96 | EMAIL hqc-inquiry@qcells.com | WEB www.qcells.com

qcells