

powered by

Q.ANTUM DUO

Q.PEAK DUO L-G6.3 / BGT 405-420

BIFACIAL DOUBLE GLASS MODULE
WITH EXCELLENT RELIABILITY
AND ADDITIONAL YIELD



BIFACIAL ENERGY YIELD GAIN OF UP TO 20 %

Bifacial Q.ANTUM solar cells make efficient use of light shining on the module rear-side for radically improved LCOE.



LOW ELECTRICITY GENERATION COSTS

Q.ANTUM DUO combines cutting edge cell separation and innovative wiring with Q.ANTUM Technology for higher yield per surface area, lower BOS costs, higher power classes, and an efficiency rate of up to 19.8%.



INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behavior.



ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID and Anti PID Technology¹, Hot-Spot Protect and Traceable Quality Tra.Q™.



FRAME FOR VERSATILE MOUNTING OPTIONS

High-tech aluminum alloy frame protects from damage, enables use of a wide range of mounting structures and is certified regarding IEC for high snow (5400 Pa) and wind loads (3000 Pa).



A RELIABLE INVESTMENT

Double glass module design enables extended lifetime with 12-year product warranty and improved 30-year performance warranty².

¹ APT test conditions according to IEC / TS 62804-1:2015 method B (-1500 V, 168h) including post treatment according to IEC 61215-1-1 Ed. 2.0 (CD)

² See data sheet on rear for further information

THE IDEAL SOLUTION FOR:




Rooftop arrays on commercial/industrial buildings



Ground-mounted solar power plants

MECHANICAL SPECIFICATION

| | |
|--------------|--|
| Format | 81.9 in × 40.5 in × 1.37 in (including frame) (2080 mm × 1030 mm × 35 mm) |
| Weight | 62.8 lbs (28.5 kg) |
| Front Cover | 0.07 in (2 mm) thermally pre-stressed glass with anti-reflection technology |
| Back Cover | 0.07 in (2 mm) semi-tempered glass |
| Frame | Anodized aluminum |
| Cell | 6 × 24 monocrystalline Q.ANTUM solar half cells |
| Junction Box | 3.42-3.94 in × 1.26-1.51 in × 0.73 in (87-100.3 mm × 32-38.5 mm × 18.7 mm), IP67, with bypass diodes |
| Cable | 4 mm ² Solar cable; (+) ≥ 1.7 in (450 mm), (-) ≥ 7.87 in (200 mm) |
| Connector | Stäubli MC4-Evo2, Hanwha Q CELLS HQC4, Amphenol UTX, Renhe 05-8, JMTHY JM601A, Tongling Cable01S-F; IP68 or Friends PV2e; IP67 |

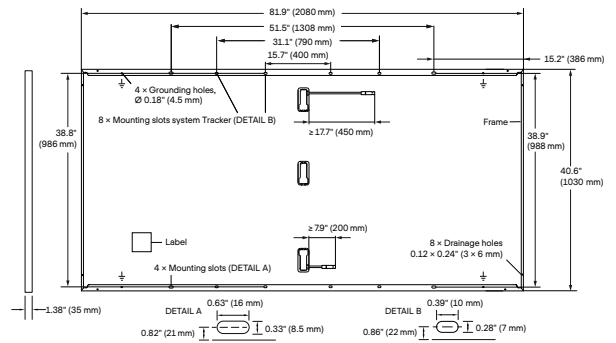

ELECTRICAL CHARACTERISTICS

| POWER CLASS | | 405 | 410 | 415 | 420 | |
|---|------------------------------------|---------------|-------|-------|-------|-------|
| MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ AND BSTC ¹ (POWER TOLERANCE +5 W / -0 W) | | | | | | |
| Minimum | Power at MPP ¹ | P_{MPP} [W] | 405 | 443.0 | 448.5 | 453.9 |
| | Short Circuit Current ¹ | I_{SC} [A] | 10.65 | 11.66 | 11.71 | 11.76 |
| | Open Circuit Voltage ¹ | V_{OC} [V] | 48.14 | 48.31 | 48.39 | 48.56 |
| | Current at MPP | I_{MPP} [A] | 10.14 | 11.09 | 10.18 | 11.14 |
| | Voltage at MPP | V_{MPP} [V] | 39.95 | 39.94 | 40.27 | 40.26 |
| | Efficiency ¹ | η [%] | ≥18.9 | ≥20.7 | ≥19.1 | ≥20.9 |

Bifaciality of P_{MPP} and I_{SC} 70% ± 5% • Bifaciality given for rear side irradiation on top of STC (front side) • According to IEC 60904-1-2


¹Measurement tolerances P_{MPP} ± 3%; I_{SC} , V_{OC} ± 5% at STC: 1000 W/m²; *at BSTC: 1000 W/m² + ϕ × 135 W/m², ϕ = 70% ± 5%, 25 ± 2 °C, AM 1.5 according to IEC 60904-3

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT²

| | | | | | | |
|---------|-----------------------|---------------|-------|-------|-------|-------|
| Minimum | Power at MPP | P_{MPP} [W] | 303.3 | 307.0 | 310.8 | 314.5 |
| | Short Circuit Current | I_{SC} [A] | 8.58 | 8.62 | 8.65 | 8.69 |
| | Open Circuit Voltage | V_{OC} [V] | 45.39 | 45.62 | 45.86 | 46.09 |
| | Current at MPP | I_{MPP} [A] | 7.98 | 8.01 | 8.05 | 8.09 |
| | Voltage at MPP | V_{MPP} [V] | 38.01 | 38.31 | 38.61 | 38.90 |

²800 W/m², NMOT, spectrum AM 1.5


Q CELLS PERFORMANCE WARRANTY

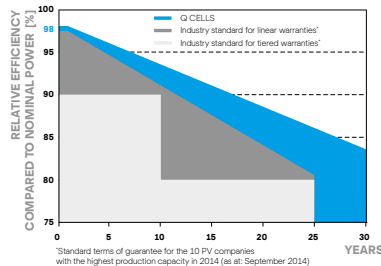

At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 83.5% of nominal power up to 30 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

PERFORMANCE AT LOW IRRADIANCE

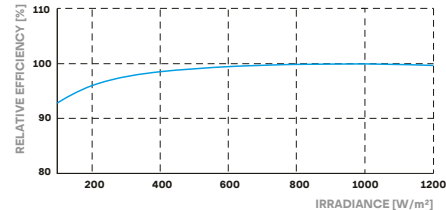

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m²)

TEMPERATURE COEFFICIENTS

| | | | | | |
|--------------------------------------|----------------|-------|--------------------------------------|---------------|-----------------------|
| Temperature Coefficient of I_{SC} | α [%/K] | +0.04 | Temperature Coefficient of V_{OC} | β [%/K] | -0.27 |
| Temperature Coefficient of P_{MPP} | γ [%/K] | -0.35 | Nominal Module Operating Temperature | NMOT [°F] | 108 ± 5.4 (42 ± 3 °C) |

PROPERTIES FOR SYSTEM DESIGN

| | | | | |
|--|------------------------|------------------------------|---|---|
| Maximum System Voltage V_{SYS} | [V] | 1500 (IEC)/1500 (UL) | PV module classification | Class II |
| Maximum Series Fuse Rating | [A DC] | 20 | Fire Rating based on ANSI / UL 61730 | TYPE 29 ⁴ |
| Max. Design Load, Push / Pull ³ | [lbs/ft ²] | 75 (3600 Pa) / 42 (2000 Pa) | Permitted Module Temperature on Continuous Duty | -40 °F up to +185 °F (-40 °C up to +85 °C) |
| Max. Test Load, Push / Pull ³ | [lbs/ft ²] | 113 (5400 Pa) / 63 (3000 Pa) | | |

³ See Installation Manual

⁴ New Type is similar to Type 3 but with metallic frame

QUALIFICATIONS AND CERTIFICATES

UL 61730, CE-compliant,
IEC 61215:2016,
IEC 61730:2016,
U.S. Patent No. 9,893,215
(solar cells)



PACKAGING AND TRANSPORT INFORMATION

| | | | | | | | |
|----------------------|--------------------|--------------------|--------------------|-----------------------|------------|------------|------------|
| Horizontal packaging | 83.8 in 2130 mm | 42.5 in 1080 mm | 47.1 in 1196 mm | 191.2 lbs 867.4 kg | 22 pallets | 22 pallets | 29 modules |
|----------------------|--------------------|--------------------|--------------------|-----------------------|------------|------------|------------|

Note: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Hanwha Q CELLS America Inc.

400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | TEL +1 949 748 59 96 | EMAIL inquiry@us.q-cells.com | WEB www.q-cells.us